

Other Related Products

PTFE Ejector

Suitable for suction of corrosive gases



PTFE Needle Valve

Suitable for adjustment of flow rate from shut down to micro flow



PTFE, PFA Lever Valves

Manual lever ensures easy opening and closing.



Speed Controller for Pilot Air Control

TSC-60W




Specifications

Item	Model	TSC-60W
Media		Air
Operating pressure range	MPa [kgf/cm ²] [psi.]	0~0.9 {0~9.2} {0~131}
Operating temperature range	°C [°F]	5~60 {41~140}
Cracking pressure	MPa [kgf/cm ²] [psi.]	0.05 {0.51} {7.3}
Description		Both directions adjustment speed controller
		Low flow rate type
		Special piping direction
		Black knob on one side

Symbol



Dimensions mm [in.]

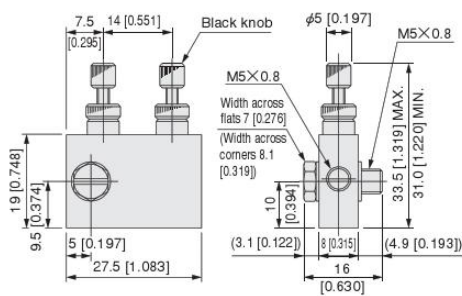

Flow rate characteristics

